
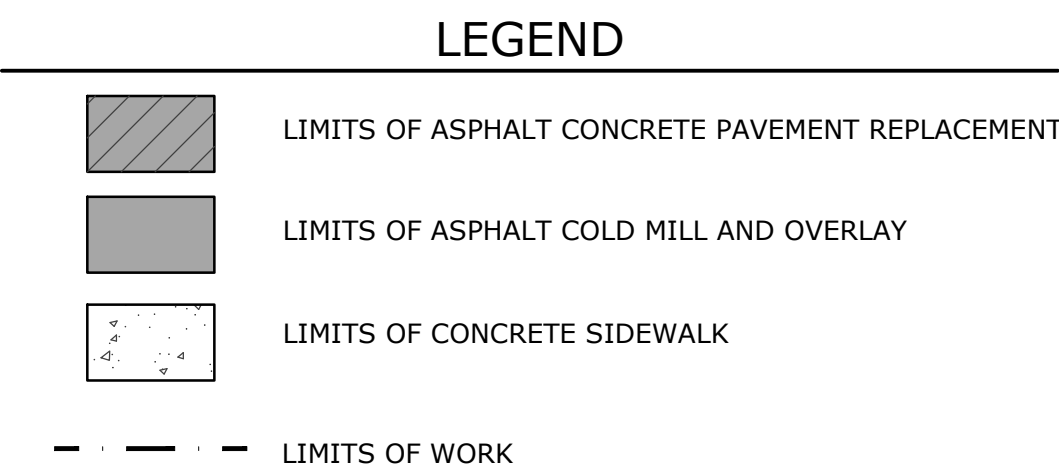



| PARKING STALL COUNT |          |          |
|---------------------|----------|----------|
|                     | EXISTING | PROPOSED |
| REGULAR             | 61       | 60       |
| ADA                 | 3        | 3        |
| EV                  | 0        | 1        |

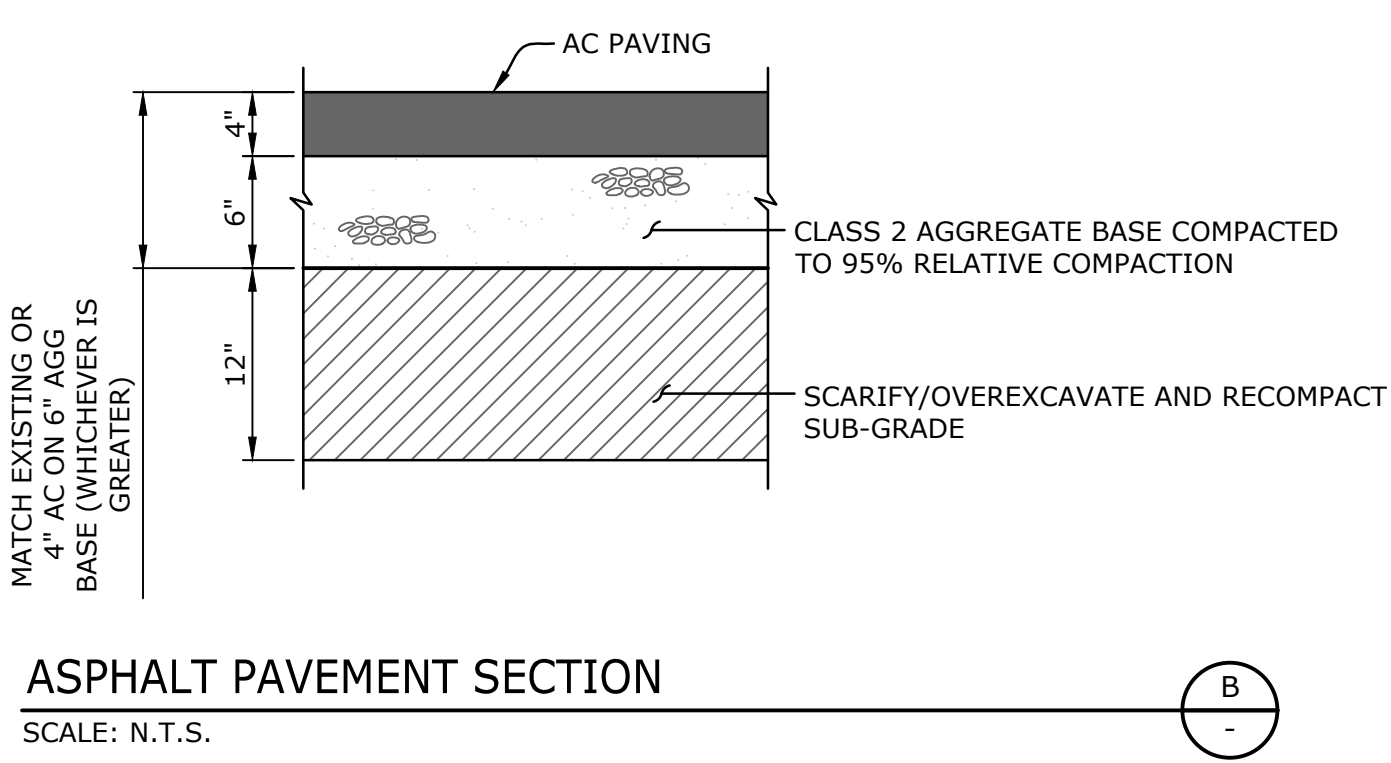

- CONSTRUCTION NOTES**
1. CONSTRUCT 1-1/2" COLD MILL AND OVERLAY.
  2. PROTECT EXISTING IMPROVEMENT IN PLACE.
  3. FURNISH AND INSTALL 4" WIDE WHITE PARKING STRIPE.
  4. FURNISH AND INSTALL 4" BLUE BORDER STRIPES AND 4" DIAGONAL HATCHED STRIPES AT 36" MAX O.C. WITH 12" "NO PARKING" WITHIN THE ACCESS AISLE PER SECTION 11B-502.3 OF THE 2016 CALIFORNIA BUILDING CODE.
  5. FURNISH AND INSTALL ACCESSIBILITY SYMBOL PER SECTION 11B-502.6.4.1 OF THE 2016 CALIFORNIA BUILDING CODE.
  6. FURNISH AND INSTALL CALIFORNIA MUTCD R99, R99B, AND R7-8B SIGN(S) AND POST PER CALTRANS REVISED STANDARD PLAN A90A, SEE DETAIL "A" HEREON.
  7. CONSTRUCT CONCRETE SIDEWALK CURB RAMP CASE A PER SPPWC STANDARD PLAN 111-5.
  8. FURNISH AND INSTALL SURFACE MOUNTED DETECTABLE/TACTILE WARNING SURFACE PER SPPWC 111-5.
  9. FURNISH AND INSTALL CROSSWALK STRIPING.
  10. CONSTRUCT CONCRETE SIDEWALK PER CITY OF OXNARD STANDARDS.
  11. CONSTRUCT CONCRETE PARKING BUMPER PER CALTRANS STANDARD SPECIFICATIONS SECTION 78-5.
  12. CONSTRUCT ASPHALT PAVEMENT SECTION PER DETAIL "B" HEREON.
  13. CONSTRUCT COMMERCIAL CONCRETE DRIVEWAY PER SPPWC 110-2.
  14. PROPOSED ELECTRIC VEHICLE PARKING STALL.
  15. CONSTRUCT BOLLARD AND ELECTRICAL VEHICLE CHARGING STATION PER ELECTRICAL PLANS.

**CAUTION: UNDERGROUND STRUCTURES**

ALL UNDERGROUND UTILITIES OR STRUCTURES REPORTED BY THE OWNER OR THOSE SHOWN ON RECORDS EXAMINED ARE INDICATED WITH THEIR APPROXIMATE LOCATION AND EXTENT. THE CONTRACTOR, BY ACCEPTING THESE PLANS OR PROCEEDING WITH IMPROVEMENTS PURSUANT THERETO, UNDERSTANDS THAT THEY AGREE TO ASSUME LIABILITY, AND AGREE TO HOLD THE UNDERSIGNED HARMLESS FOR ANY LIABILITY FOR DAMAGE RESULTING FROM THE EXISTENCE OF UNDERGROUND UTILITIES OR STRUCTURES NOT REPORTED TO THE UNDERSIGNED, NOT INDICATED ON THE PUBLIC RECORDS EXAMINED, LOCATED AT VARIANCE WITH THAT REPORTED OR SHOWN ON RECORDS EXAMINED. THE CONTRACTOR IS REQUIRED TO TAKE DUE PRECAUTIONARY MEASURES TO PROTECT THE UTILITIES OR STRUCTURES FOUND AT THE SITE. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO NOTIFY THE OWNERS OF THE UTILITIES OR STRUCTURES CONCERNED BEFORE STARTING TO WORK.

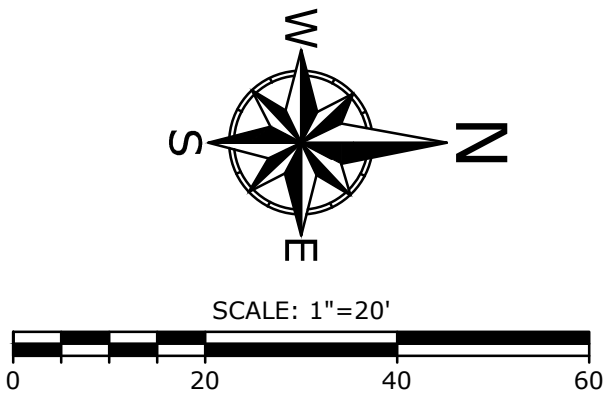

| REVISION | DESCRIPTION | APP | DATE |
|----------|-------------|-----|------|
| D        |             |     |      |
| C        |             |     |      |
| B        |             |     |      |
| A        |             |     |      |

|          |     |
|----------|-----|
| DESIGNED | TJM |
| DRAWN    | TJM |
| CHECKED  | —   |
| APPROVED | —   |

|                                   |
|-----------------------------------|
| APPROVED: COUNTY OF VENTURA       |
| DATE: _____                       |
| BY: _____                         |
| DEVELOPMENT & INSPECTION SERVICES |

**COUNTY OF VENTURA**  
**PUBLIC WORKS AGENCY**  
**HARBOR DEPARTMENT**

|           |   |
|-----------|---|
| SPEC. NO. | — |
| PROJ. NO. | — |

**KIDDLE BEACH**  
**PARKING LOT REHABILITATION**

|             |    |
|-------------|----|
| SHEET       | 3  |
| OF          | 14 |
| DRAWING NO. |    |